a VERDER company

MACRO HARDNESS TESTER

QNESS 250 / 750 / 3000 E EVO

qatm.com/products/hardness-testing/macro-hardness-tester/qness-250-750-3000-e/

QNESS 250 / 750 / 3000 E EVO

MACRO HARDNESS TESTER

A hardness tester for all purposes: no matter if operated in a laboratory or in a rough production environment.

The fixed component support and extra-large test table area allow hardness testing of even the largest components.

In the “E” version, the test head is conveniently and dynamically controlled by the integrated asynchronous motor. Test pieces of virtually any size, weighing up to 3500 kg, are securely clamped in the device. The maximum test height is 510 mm.

8-POSITION TOOL CHANGER

FASTER TEST METHOD CHANGE-OVER

Brinell, Knoop, Rockwell or Vickers hardness testing? The sophisticated tool-changer concept with a rotational axis angle of 15° provides space for 8 tools in one uniquely compact unit. Downholder elements with a closed shape on three sides guarantee secure workpiece clamping around the test point – even for small test pieces.

TEST FORCE VARIANTS

TEST METHODS & FORCE RANGE

QNESS 250 E

BRINELL

DIN EN ISO 6506, ASTM E-10

HBW 1/1 · 1/2.5 · 1/5 · 1/10 · 1/30; HBW 2.5/6.25 · 2.5/15.6 · 2.5/31.25 · 2.5/62.5 · 2.5/187.5; HBW 5/25 · 5/62.5 · 5/125 · 5/250; HBW 10/100 · 10/250; HBT*

ROCKWELL

DIN EN ISO 6508, ASTM E-18

HRA - HRV · HR15-N/T/W/X/Y · HR30-N/T/W/X/Y · HR45-N/T/W/X/Y

VICKERS

DIN EN ISO 6507, ASTM E-92, ASTM E-384

HV 1 · 2 · 3 · 5 · 10 · 20 · 30 · 50 · 100; HVT*

KNOOP

DIN EN ISO 4545, ASTM E-92, ASTM E-384

HK 1 · HK 2

PLASTICS

DIN EN ISO 6507, ASTM E-92, ASTM E-384

49.03 N · 132.9 N · 357.9 N · 961 N

* Not according to standards. Integrated conversions: DIN EN ISO 18265, DIN EN ISO 50150, ASTM E140.

TEST FORCE VARIANTS

TEST METHODS & FORCE RANGE

QNESS 750 E

0.3 kg — 750 kg

BRINELL

DIN EN ISO 6506, ASTM E-10

HBW 1/1 · 1/2.5 · 1/5 · 1/10 · 1/30; HBW 2.5/6.25 · 2.5/15.6 · 2.5/31.25 · 2.5/62.5 · 2.5/187.5; HBW 5/25 · 5/62.5 · 5/125 · 5/250 · 5/750; HBW 10/100 · 10/250 · 10/500; HBT*

ROCKWELL

DIN EN ISO 6508, ASTM E-18

HRA - HRV · HR15-N/T/W/X/Y · HR30-N/T/W/X/Y · HR45-N/T/W/X/Y

VICKERS

DIN EN ISO 6507, ASTM E-92, ASTM E-384

HV 0,3 · 0.5 · 1 · 2 · 3 · 5 · 10 · 20 · 30 · 50 · 60 · 100; HVT*

KNOOP

DIN EN ISO 4545, ASTM E-92, ASTM E-384

HK 0,3 · 0.5 · 1 · 2

PLASTICS

DIN EN ISO 2039

49.03 N · 132.9 N · 357.9 N · 961 N

* Not according to standards. Integrated conversions: DIN EN ISO 18265, DIN EN ISO 50150, ASTM E140.

TEST FORCE VARIANTS

TEST METHODS & FORCE RANGE

QNESS 3000 E

0.3 kg — 3000 kg

BRINELL

DIN EN ISO 6506, ASTM E-10

HBW 1/1 · 1/2.5 · 1/5 · 1/5 · 1/10 · 1/30; HBW 2.5/6.25 · 2.5/15.6 · 2.5/31.25 · 2.5/62.5 · 2.5/187.5; HBW 5/25 · 5/62.5 · 5/125 · 5/250 · 5/750; HBW 10/100 · 10/250 · 10/500 · 10/1000 · 10/1500 · 10/3000; HBT*

ROCKWELL

DIN EN ISO 6508, ASTM E-18

HRA - HRV · HR15-N/T/W/X/Y · HR30-N/T/W/X/Y · HR45-N/T/W/X/Y

VICKERS

DIN EN ISO 6507, ASTM E-92, ASTM E-384

HV 0,3 · 0.5 · 1 · 2 · 3 · 5 · 10 · 20 · 30 · 50 · 100; HVT*

KNOOP

DIN EN ISO 4545, ASTM E-92, ASTM E-384

HK 0,3 · 0.5 · 1 · 2

PLASTICS

DIN EN ISO 2039

49.03 N · 132.9 N · 357.9 N · 961 N

* Not according to standards. Integrated conversions: DIN EN ISO 18265, DIN EN ISO 50150, ASTM E140.

LARGE-SCALE UNIVERSALITY

UNIQUE INSTRUMENT FEATURES

DYNAMIC HEIGHT ADJUSTMENT

The dynamic height adjustment enables comfortable positioning control via potentiometer (8 mm/s). Using the 2-hand-safety device allows a moving speed of up to 17 mm/s (included with E variant).

SWIVELING DOWNHOLDER

No long tool changeovers for inaccessible test positions. The downholder can be swivelled in and out via manual or motorized action, as required. Furthermore, the clamping elements can be changed easily and adapted to suit the customer‘s component.

WORKPIECE RECOGNITION

Workpiece recognition with motorized height adjustment facilitates a high test head movement speed of 17 mm/s. Sensor technology enables the workpiece to be recognized and the bracing speed to be reduced accordingly to protect the device and workpiece.

DYNAMIC HEIGHT ADJUSTMENT

The dynamic height adjustment enables comfortable positioning control via potentiometer (8 mm/s). Using the 2-hand-safety device allows a moving speed of up to 17 mm/s (included with E variant).

LARGE-SCALE UNIVERSALITY

UNIQUE INSTRUMENT FEATURES

MAXIMUM CLAMPING SAFETY

High-performance induction motor in the E version facilitates a workpiece clamping force of up to 3500 kg. Clamping power is adapted to the test method and is automatically set to be greater than the test force. Operators do not need to set levels and can rely on the device to guarantee safe, optimized adaption.

ENLARGED TEST HEIGHT

If the 510mm height of the test room is still not enough for especially large, bulky or difficult-to-clamp items, on request QATM can provide an even taller machine frame. The robust steel frame can be produced in customized dimensions.

MACRO HARDNESS TESTER E EVO

HIGHLY ACCURATE RESULTS IN ULTRA-SHORT TIME

XLED BRINELL EVALUATION LENSES

XLED illumination modules revolutionize the analysis of Brinell indentations. Due to beading on commercially available lenses, soft Brinell indentations in particular can be subject to imprecise gauging results. In contrast, XLED lenses guarantee precise and repeatable measurements, regardless of material type and hardness, due to direct and wide-extension illumination.

MACRO HARDNESS TESTER E EVO

HIGHLY ACCURATE RESULTS IN ULTRA-SHORT TIME

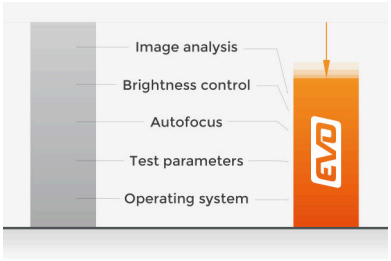

REDUCED CYCLE TIMES

The new EVO product line guarantees optimized test parameters, a faster Windows 10 PC, much shorter serial autofocus times, significantly faster regulation of brightness and image evaluation, all of which contributes to far more rapid cycle completion times in everyday hardness testing – with even quieter operating noises.

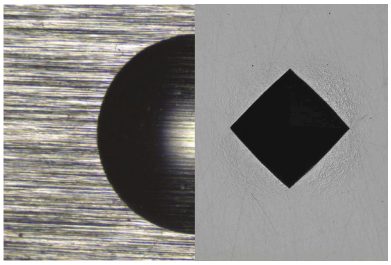

EXCELLENT IMAGE QUALITY

The optics system of the new hardness tester series EVO has been completely redeveloped. It was built on site in the cleanroom at the QATM plant and benefits from the company's comprehensive expertise. All hardness testers of the new series share one universal microscope system covering all the necessary visual ranges between 0.1 mm and 8 mm in maximum clarity and contrast. The QATM system guarantees uniform illumination across the entire image, regardless of the degree of magnification, and without dark edges.

MACRO HARDNESS TESTER E EVO

UNLIMITED SUITABILITY FOR INDUSTRIAL APPLICATIONS

FREELY ADJUSTABLE OPERATING DISPLAY

The 12" ultra-flat, capacitive touch display can be raised, lowered and tilted smoothly via ball-and-socket joints for ergonomically optimized use.

MACRO HARDNESS TESTER E EVO

UNLIMITED SUITABILITY FOR INDUSTRIAL APPLICATIONS

OPTIMIZED TEST HEAD DESIGN

A range of clamping and holding elements can be configured to suit tooling requirements. The optional transparent collision guard can protect tools on the device from damage while ensuring an unrestricted view of the test cell interior.

ETHERNET INDUSTRIAL COLOR CAMERA

High-quality CMOS 5-megapixel cameras with Ethernet data transfer define the current industrial standard. Unlike other camera systems, a far higher transmission stability is possible here. Additionally, the PC and hardness testing device can be set up remotely at great distances from each other. This is ideal in manufacturing environments in which the control infrastructure is installed in external switch cabinets.

IOT – INTERNET OF THINGS

THE PLATFORM FOR REMOTE ACCESS TO YOUR DEVICES

All QATM hardness testers with QpixControl2 and QpixT2 software seamlessly integrate into the Verder Scientific IoT platform, providing enhanced functionality and seamless connectivity.

- **Real-time Monitoring:** Monitor your machinery in real time, from anywhere in the world.
- **Live Notifications:** Real-time notifications ensure you stay informed about your equipment's performance, leading to proactive maintenance.
- **Effortless Backup:** Back up a single device or an entire fleet, minimizing downtime and data loss.
- **Automatic & Free Software Updates:** Machines are consistently equipped with the latest software.

QPIX T2 FULL SCREEN MODE

CLEAR FOCUS ON ESSENTIALS

FULL SCREEN MODE

A clear overview of all the most important functions on one screen guarantees user-friendliness and, most importantly, ensures test results are clearly prioritized.

MULTI-TOUCH CAPACITY FOR ULTRA-SIMPLE OPERATION

Modern multi-touch operation for simple zooming and easy menu navigation.

INDUSTRY 4.0

QCONNECT FOR CONNECTED TOMORROWS

Qconnect is the interface in QATM Qpix Control2 software, providing customers with a full portfolio of inter-device connectivity - from serial production, open XML interfaces (bi-directional) and pre-specified plug-in solutions, such as the QDAS Plug-In+, through to customer-specific connectivity solutions implemented completely by QATM. We have a professional solution for every applicational requirement.

Available functionalities & formats: REPORT, PRINT, PDF, XML IE, CSV, TXT, WORD, EXCEL, AUTO EXPORTER, MAIL, Q-DAS, AMS IE, IOT, LIMS, OPCUA, PCI IE (ERP, BABTEC, ORACLE, SAP)

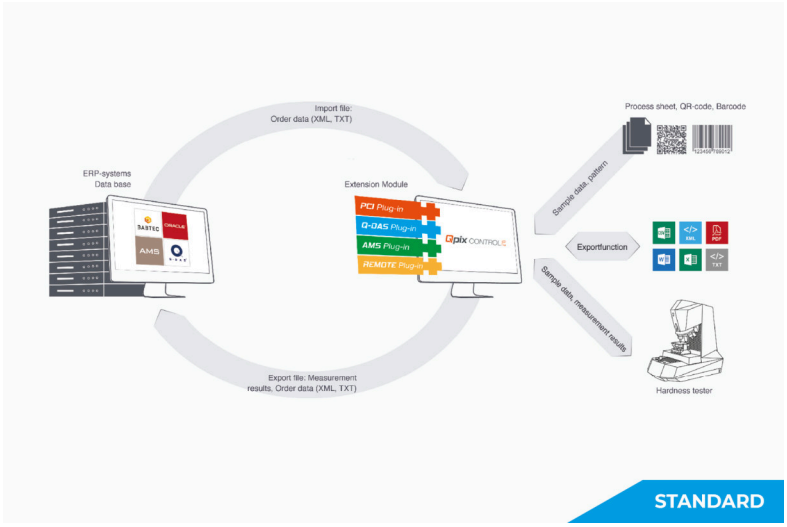

FLEXIBLE, CUSTOMERS SPECIFIC AND AFFORDABLE

FOR YOUR TESTING NEEDS

We offer the very best solutions for your testing needs - from workpiece bracing, extended test area and possibilities for automation to software adaption.

Workpiece bracing

Manually cross slide

Extended test area

MACRO HARDNESS TESTERS

CONFIGURE YOUR HARDNESS TESTER TO MATCH YOUR APPLICATION

With the QATM Configurator, you can easily tailor your hardness tester to your individual requirements. Select the appropriate device version, equipment, and accessories, and submit your configuration directly as a non-binding request for quotation to QATM.



YOUR BENEFITS AT A GLANCE

- Configure individually: Select the device, equipment, and accessories to match your application
- Simple & clear: Step by step to your desired device configuration
- Request directly: Submit your configuration easily as a free and non-binding request for quotation
- Personal support: QATM experts assist you in selecting the right solution

QNESS 250 / 750 / 3000 E EVO

TECHNICAL DATA

Supported test methods	Brinell, Vickers, Rockwell, Knoop, Plastics
Test force range	Qness 250 E EVO: 1 - 250 kg (9.81 - 2450 N) | Qness 750 E EVO: 0.3 – 750 kg (2.94 – 7358 N) | Qness 3000 E: 0.3 - 3000 kg (2.94 - 29430 N)
Height adjustment	electrical / asynchron motor
Test height / Throat depth	510 mm / 320 mm
Test anvil	584 x 450 mm
Max. work piece weight	“unlimited”
Weight of basic machine	500 kg
Test sequence	fully automatic / electronic force control
Camera system / Image transfer	5 MP Ethernet Industrial standard / up to 270FPS
Tool positions	2 (Standard) oder 8 (Tool Changer)
Software	Qpix T2 (Option: Qpix CONTROL 2 M)
Operating system / Hard disk	Windows 11 IoT / 128 GB SSD
Data interfaces	2x USB 3.0, 2x USB 2.0, 1x RJ45 (Ethernet), 1x RS232, 1x DisplayPort
Lenses	XLED 1, XLED 2, XLED 5, 5x, 10x, 20x, 50x, 100x
Fields of view (depending on tool selection)	0.113x 0.084 mm (100x) up to 7.98 x 5.97 mm (XLED 1)
Display	Capacitive 12“ Touch - Display
Power connection	230~ 50-60Hz 1/N/PE (option: 110~1/N/PE)
Max. power consumption	~ 1230 W
Additional options	designer pedestal, collision protection, cross laser, test anvils, prisms, data connections, barcode/QR code reader etc.

QNESS 250 / 750 / 3000 E EVO

CONTACT US →

qatm.com/contact/contact-form/?prefilltext=contact_form.request&product=Q01J0009A

REQUEST A QUOTE →

qatm.com/products/hardness-testing/macro-hardness-tester/configurator/

a VERDER company

qatm.com/products/hardness-testing/macro-hardness-tester/qness-250-750-3000-e/

© QATM – qatm.com / Content may be subject to modifications or corrections